EL36 / 6CM5 / PL36 / 25E5 pentode strapped as triode

Rev. 2

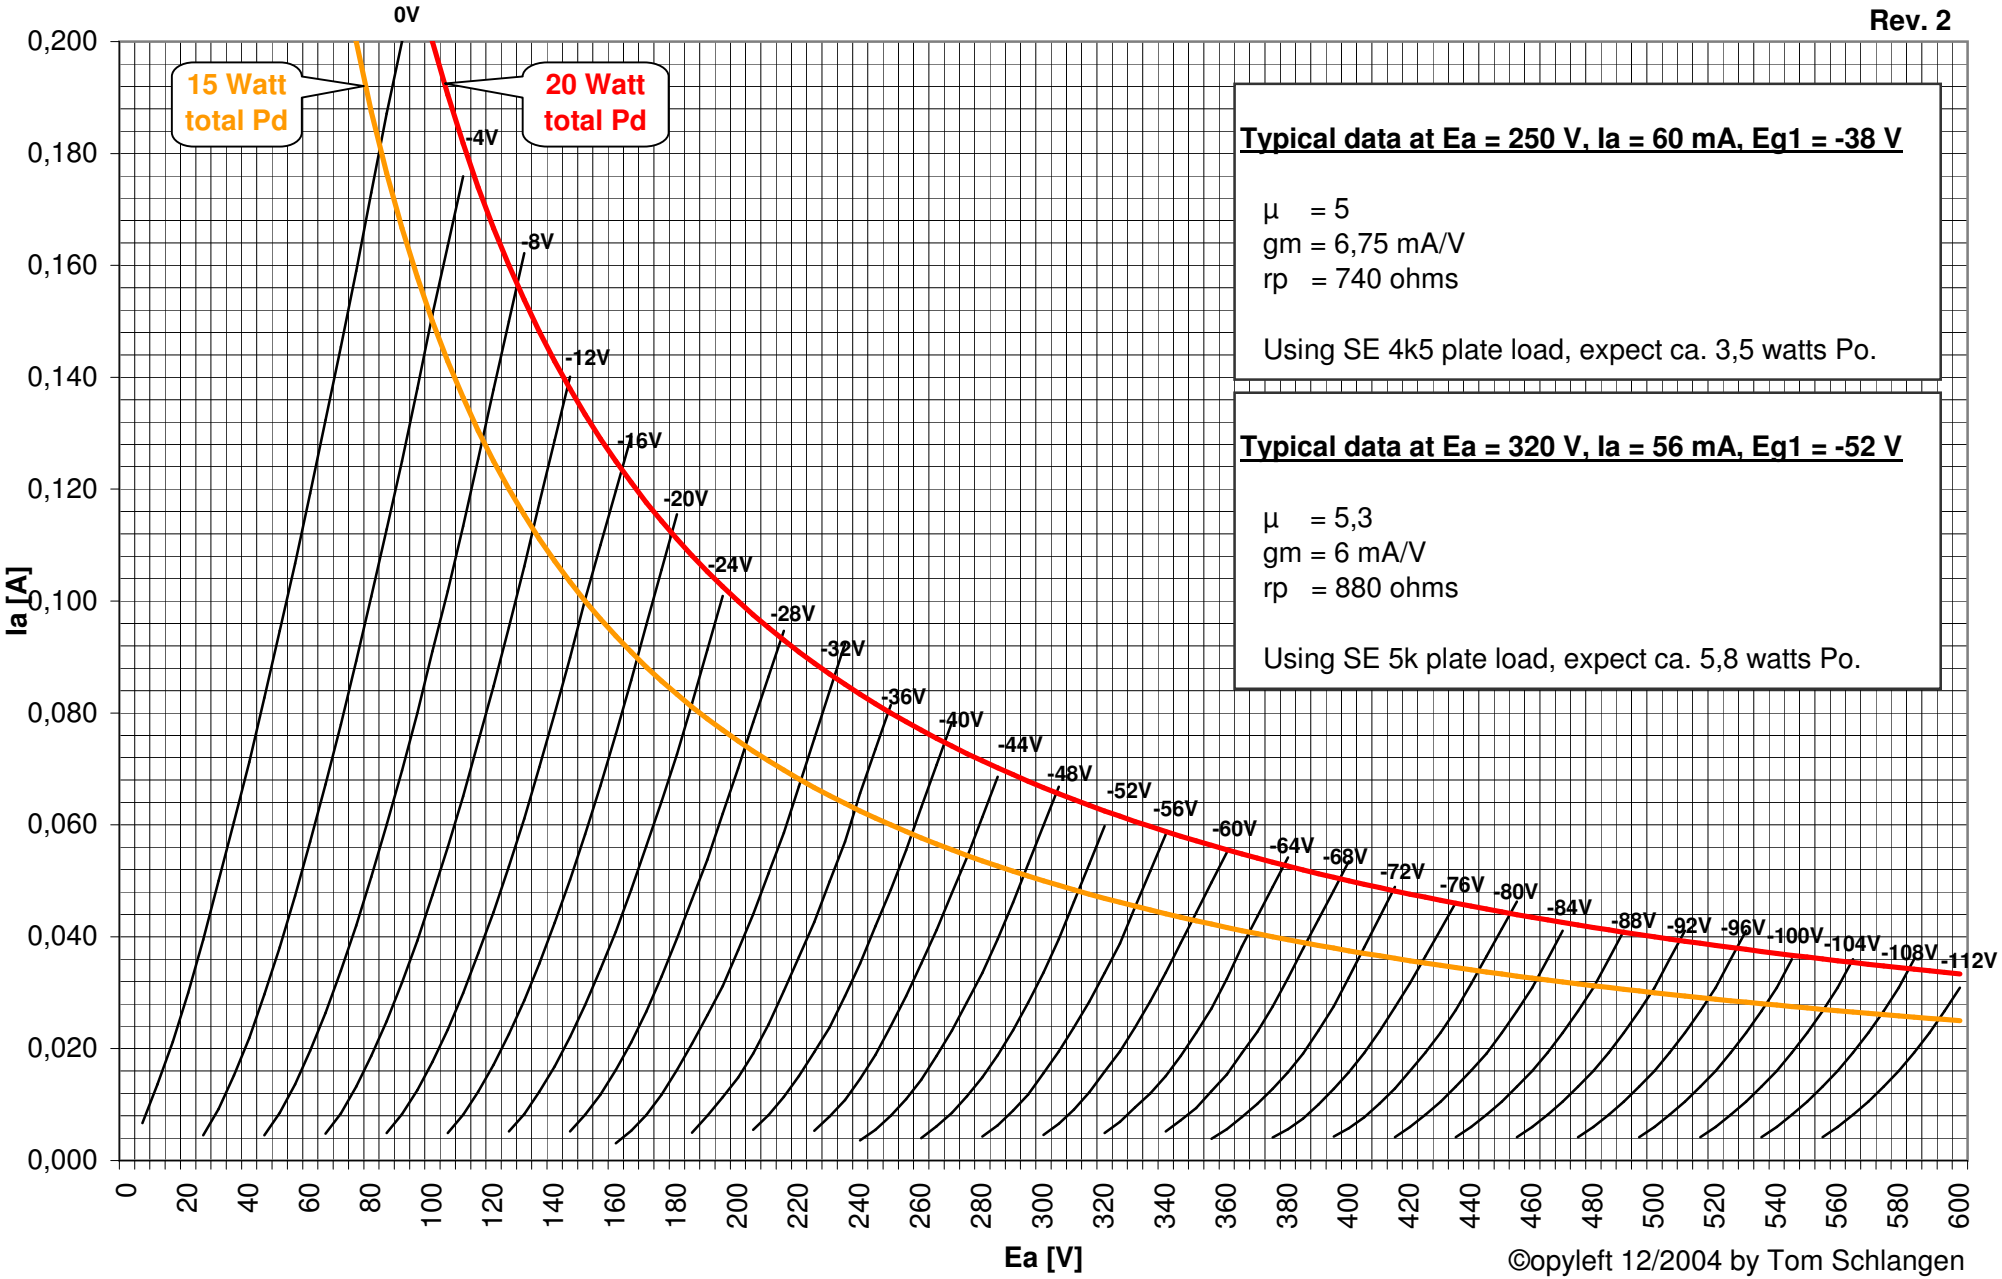

Typical data at Ea = 250 V, Ia = 60 mA, Eg1 = -38 V

μ = 5
gm = 6,75 mA/V
rp = 740 ohms

Using SE 4k5 plate load, expect ca. 3,5 watts Po.

Typical data at Ea = 320 V, Ia = 56 mA, Eg1 = -52 V

μ = 5,3
gm = 6 mA/V
rp = 880 ohms

Using SE 5k plate load, expect ca. 5,8 watts Po.

©opyleft 12/2004 by Tom Schlangen